


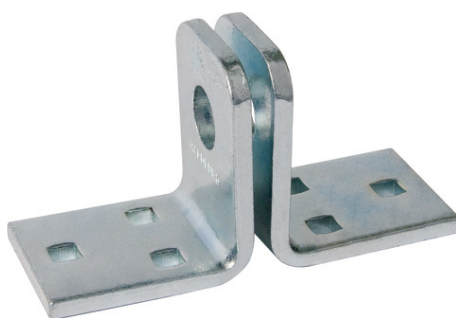

Technologies

- Corrosion protected
- Made of 5 mm hardened steel
- Install with cup head square neck bolts according to DIN 603 (carriage bolts)

Operation and use

- Suitable for doors closing flush, i.e. door leaf and door frame are level
- Also ideal for securing roller-shutters
- To be used with a padlock with up to 12 mm bolt

Technical data - 115/100

Eyelet bore hole c	14 mm
Length a	100 mm
Security Level Home Security	6
Weight	246 g
Width b	45 mm
colour	zinc plated
EAN	4003318096761

Technical drawing

